Anwendung/Application :

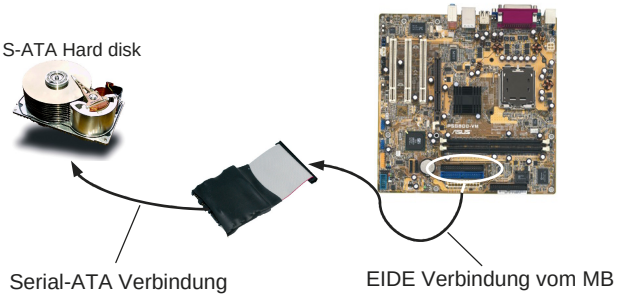

Operating System (OS):	Geprüft/Approved:	Verpackung/Packing:
Betriebssysteme unabhängig / usefull for all OS		

Konverter Serial-ATA zu EIDE oder EIDE zu Serial-ATA

Beschreibung :	• Mit der EX-3340 können sie Daten von EIDE in Serial-ATA umwandeln oder auch von Serial-ATA zu EIDE. Der EX-3340 kann somit am EIDE Port vom Motherboard angeschlossen werden. Da der EX-3340 auch Bi-Direktional funktioniert, kann man ihn an eine EIDE Festplatte anschließen und die Daten werden dann vom S-ATA Anschluss des Motherboard übermittelt. Der EX-3340 ist die richtige Lösung um EIDE Festplatten am S-ATA Port sowie S-ATA Festplatten am EIDE Port vom Motherboard anzuschließen
Merkmale :	• Der EX-3340 ist ein Bi-Direktionaler Konverter von EIDE zu Serial-ATA oder Serial-ATA zu EIDE • Einfaches Installieren • Wird direkt auf den IDE Anschluss der Festplatte gesteckt • Es können alle DMA Festplatten verwendet werden • Es wird ein Powerkabel mitgeliefert das an das Netzteil vom Rechner angeschlossen wird.
Chip-Set :	• Marvell 88i8030
Datentransfer-Rate :	• Von 66 bis 133MB/Sek.
Anschlüsse :	• 1 x 7 Pin S-ATA Anschluss, 1 x 40 Pin EIDE Anschluss , Power Anschluss
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 55^{0}C • 5 bis 95%
Hardwaresysteme :	• EIDE oder S-ATA
Abmessung / Gewicht :	• 150g
Lieferumfang :	• EX-3340, Power Kabel

Converter Serial-ATA to EIDE or EIDE zu Serial-ATA

Description:	• With the EX-3340 if possible to convert the data from EIDE to Serial-ATA or also from Serial-ATA to EIDE. The EX-3340 works bi-directional so that you can connect to the EIDE port from the Motherboard but also to the EIDE connector from the hard disk. It is the right choice for connect EIDE hard disk to the S-ATA port and also S-ATA hard disk to the EIDE port from your Motherboard.
Feature :	• The EX-3340 it's a bi-directional converter from EIDE to Serial-ATA or Serial-ATA to EIDE • Easy installation • Connect direct to the IDE connector from the hard disk • Can use all DMA hard disk • Power cable are included
Chip-Set :	• Marvell 88i8030
Data transfer rate :	• From 66 to 133MB/Sek.
Connectors :	• 1 x 7 Pin S-ATA connectors, 1 x 40 pin EIDE connector, Power connector
Operating Temperature : Operating Humidity :	• 0 up to 55^{0}C • 5 up to 95%
Hardware system :	• EIDE or S-ATA
Size / Weight :	• 150g
Packaging contents :	• EX-3340, Power cable